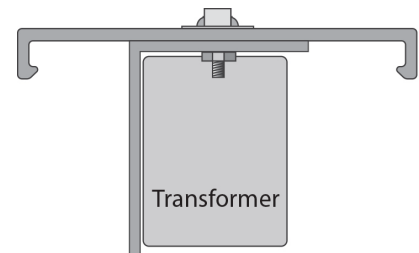


PROJECT NAME:

TYPE:

**NL-CCF-R**

- The Neotek Cold Cathode to LED retrofit fixture is a straight or curved, self-contained light emitting diode fixture replacement for the Neotek CCF fixture (Type CCF). The top has an LED light strip mounted onto a aluminum extrusion with a wiring harness that plugs into the existing base harness. A solid state 24v transformer(s) are mounted into the bottom of the extrusion. The input voltage is 120v.
- Extrusion: The extrusion shall be made of aluminum. Extrusion comes standard mill finish, it can also be powder coated with colors or patterns.
- LEDs: High output 3528 binned chips, 24v operating. Consuming 3.00 watts per foot and available in colors below. The chips and circuitry are fastened to the extrusion. The strips produce 420 lumens per foot. Angle of illumination is 120 degrees. UL Listed.
- Power Supply: The power supply is a solid state and mounted inside the bottom extrusion. Transformer specifications may change due to the current development of new unit. UL Listed.
- All LED linear fixtures are dimmable using various types of dimmers. RGB can be controlled with any DMX 512 protocol, however assistance is available from Neotek for more specific control solutions.

COLOR OF LED LIGHT:
☐ 24K White ☐ 28K White ☐ 30K White ☐ 35K White ☐ 40K White ☐ 65K White ☐ Red ☐ Green ☐ Blue ☐ Amber ☐ RGB
INPUT VOLTAGE:
☐ 120v ☐ 277V
DIMMING TYPE:
☐ 0-120VL(LV) ☐ 0-10V ☐ None
FIXTURE FINISH:
☐ Standard Mill ☐ Black ☐ Custom
APPLICATION:
☐ Interior IP00 ☐ Exterior IP67
JOB INFORMATION:**DATE:****PAGE #:**

| |
|--|
| |
|--|